
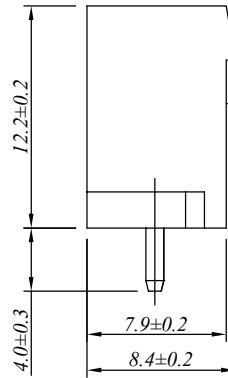


P.C.B. LAYOUT

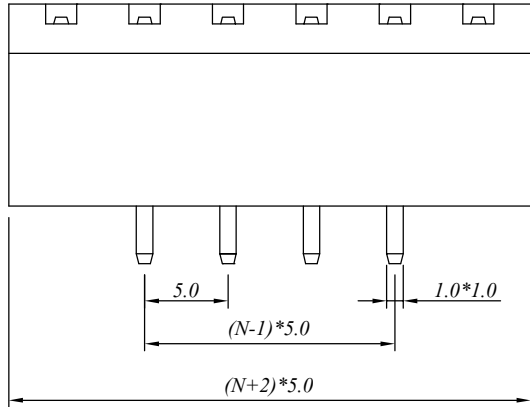

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Brass ,Tin planted

电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 450V

额定电流/Rated current:

15A 20A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions


间距/Pitch:

5.0mm

极数/Poles:

2-24P

N=Number of contacts

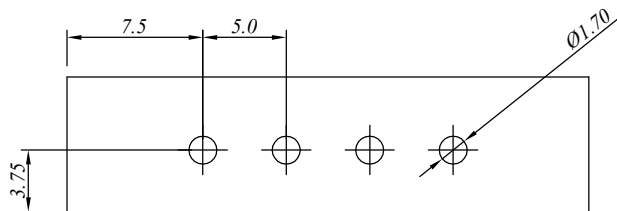

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGVM-5.00-XXP

TITLE:

PART. NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance



UNITS: mm

SCALE: 4/1


REVISIONB2

x. ±0.50



x.x ±0.30

x.xx ±0.10

xx° ±1°

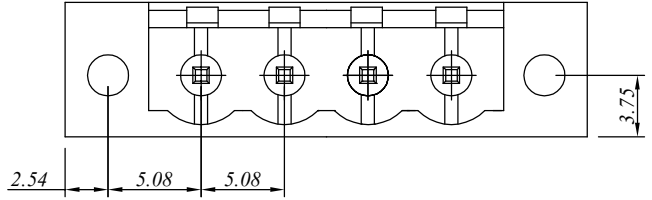


P.C.B. LAYOUT

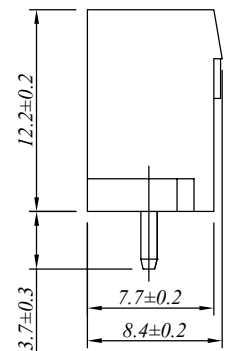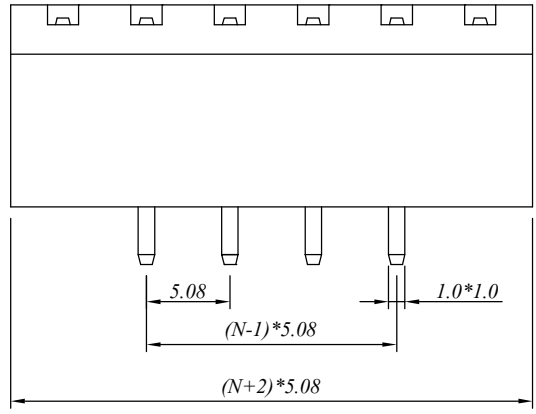

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/ <i>Material</i>		
塑件/ <i>Insulator body</i> :	PA66, UL94V-0	
焊针/ <i>Pin header</i> :	Brass ,Tin planted	
电器性能/ <i>Electrical</i>		
参考标准/ <i>Standard</i> :	UL	IEC
额定电压/ <i>Rated voltage</i> :	300V	450V
额定电流/ <i>Rated current</i> :	15A	20A
接触电阻/ <i>Contact resistance</i> :	20m Ω (max)	
绝缘电阻/ <i>Insulation resistance</i> :	500M Ω /500V	
耐电压/ <i>Withstanding voltage</i> :	AC 2000V/1Min	
机械性能/ <i>Mechanical</i>		
温度范围/ <i>Temperature range</i> :	-40°C to +105°C	
瞬间温度/ <i>Max soldering</i> :	+250°C, for 5 Sec	
尺寸/ <i>Dimensions</i>		
间距/ <i>Pitch</i> :	5.08mm	
极数/ <i>Poles</i> :	2-24P	

N=Number of contacts

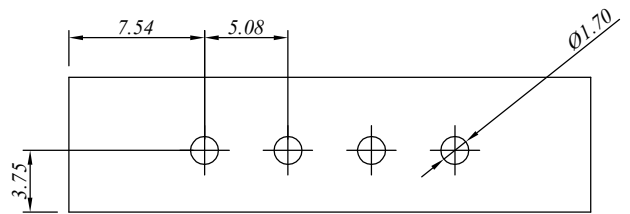

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGVM-5.08-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
				⊗	x. ±0.50
					x.x ±0.30
					x.xx ±0.10
					xx° ±1°
					UNITS: mm
					SCALE: 4/1
					REVISIONB2